




**W. Schmid AG**

LED-Technology  
the visible difference

## Surface mounted LED indicator ABL45WSF



ABL45WSF, 24 VDC

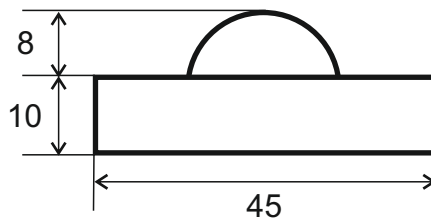

Bottom, center or lateral cable outlet possible  
2-3 mounting holes  $\varnothing$  4mm,  
Distance: 30-34mm

### Specifications:

Description:	Surface mounted LED indicator with convex lens type ABL45WSF, 45mm
Dimensions:	$\varnothing$ 45mm, H=18mm
Supply voltage:	12/24 VDC, other voltages upon request
Power consumption:	0.3/0.5W
Viewing angle:	120°
Degree of protection:	IP 65
Class of protection:	III
Operating temperature:	-40 up to +85°C
Material:	Colourless/black anodized aluminium, epoxy lens
Weight:	0.07kg
Connection:	Cable, length 1.2m
Available ill. colours:	white, warm white, red, yellow, green, blue, orange, RGB
Applications:	Pilot light, access control, industrial machine construction, wall light, floor lamp, alarm indicator etc.